


Coaxial Circulator

CC 1.060 300W ccc

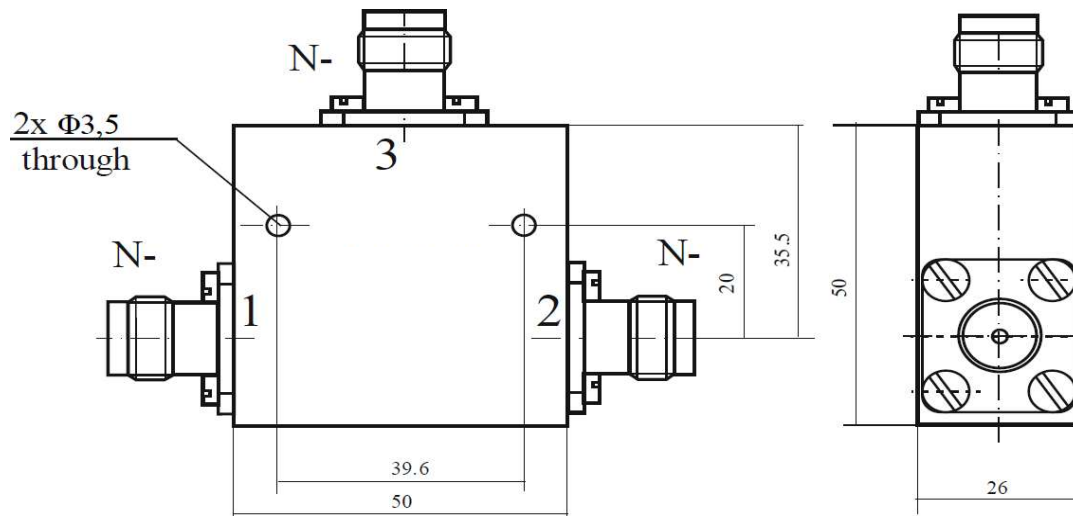

Electrical Specifications

| | Min | Max | Unit |
|---------------------|------|------|------|
| Operating Frequency | 1,03 | 1,09 | GHz |
| Insertion Loss | | 0,5 | dB |
| Isolation | 20 | | dB |
| VSWR | | 1,2 | |
| Forward Power | | 275 | W |
| Reverse Power | | 275 | W |

Mechanical Specifications

| | |
|-----------------------|-------------------------------|
| Interface/ Connectors | N - |
| Direction | CCW |
| Weight | 250 g |
| Housing Material | AlMgSi;Steel |
| Surface | Conversion Coating; Ni-coated |

Environmental Specifications

| | | |
|----------------------------|-----|-----|
| Operating Temp. Range (°C) | -10 | +65 |
|----------------------------|-----|-----|