
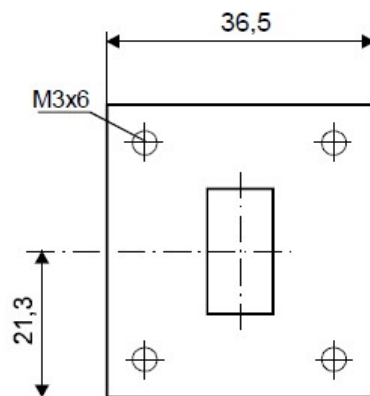
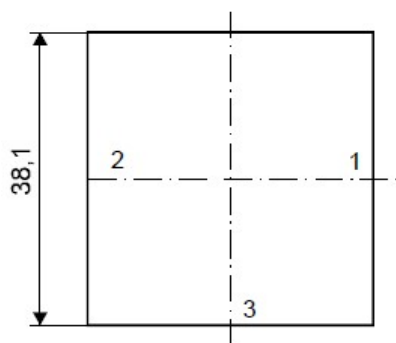


Waveguide Circulator

CW 15-30 W

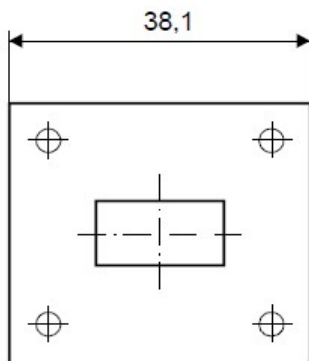

Electrical Specifications

	Min	Max	Unit
Operating Frequency	14,5	15,5	GHz
Insertion Loss		0,25	dB
Isolation	23		dB
VSWR		1,15	
Forward Power		30	W
Reverse Power		30	W

Mechanical Specifications

Interface/ Connectors	WR 62/ UBR 140
Direction	CCW
Weight	200 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications

Operating Temp. Range (°C)	-30	+70
----------------------------	-----	-----