


## Waveguide Circulator CW 6.5 M

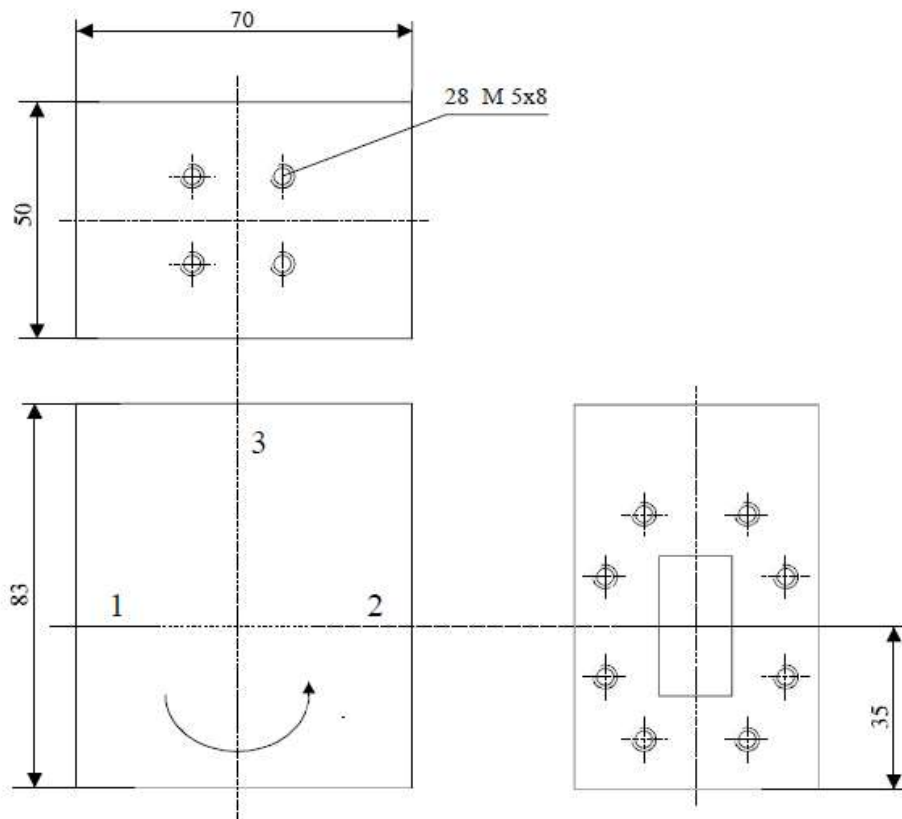

Electrical Specifications			
	Min	Max	Unit
Operating Frequency	5,925	7,125	GHz
Insertion Loss		0,3	dB
Isolation	20		dB
VSWR		1,22	
Forward Power		10	W
Reverse Power		10	W

Mechanical Specifications	
Interface/ Connectors	WR 137/ NDR 70
Direction	CCW
Weight	700 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications		
Operating Temp. Range (Celcius)	-50	+70