


## Waveguide Circulator

CW 9-660W v.3

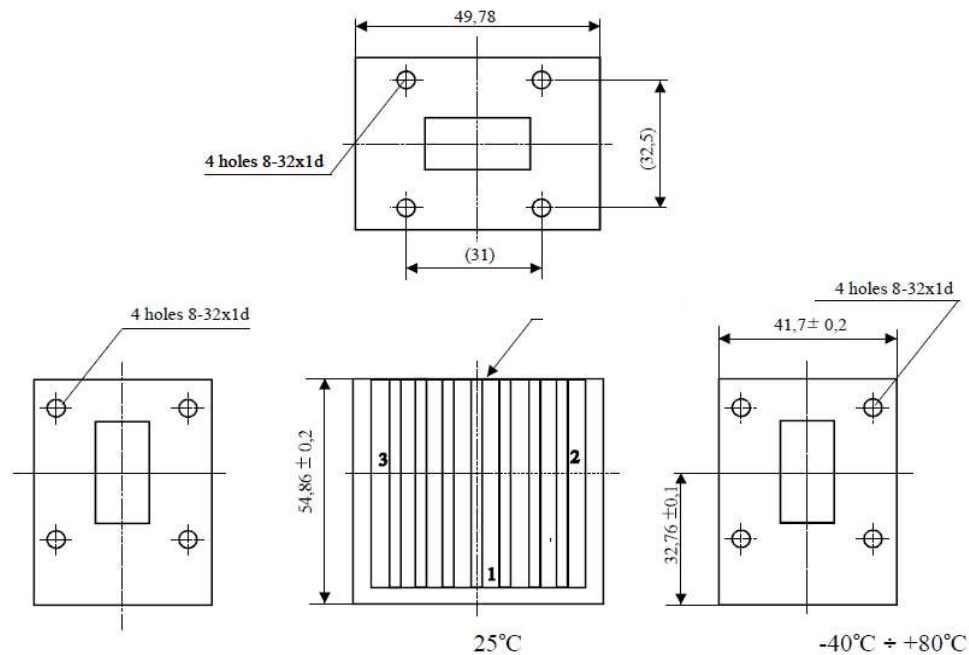

### Electrical Specifications

	Min	Max	Unit
Operating Frequency	8,5	9,5	GHz
Insertion Loss		0,5	dB
Isolation	20		dB
VSWR		1,25:1	
Forward Power		660	W
Reverse Power		660	W

### Mechanical Specifications

Interface/ Connectors	WR 90/ UG 39
Direction	CCW
Weight	250 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

### Environmental Specifications

Operating Temp. Range (°C)	-40	+80
----------------------------	-----	-----