


Waveguide Circulator

CW 9.0-400 W

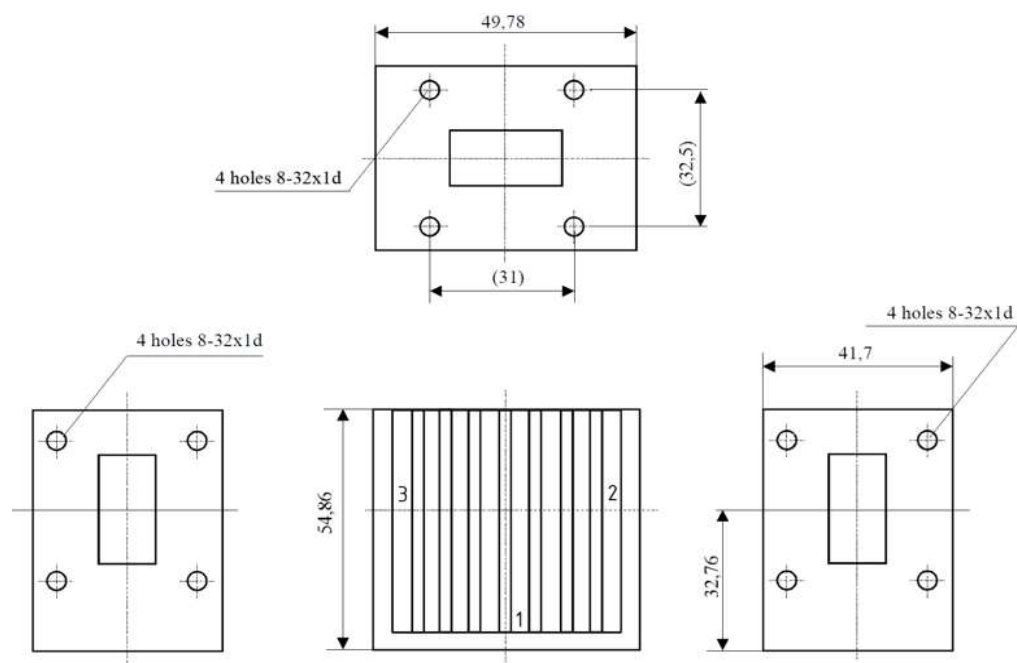

Electrical Specifications

	Min	Max	Unit
Operating Frequency	8,5	9,6	GHz
Insertion Loss		0,4	dB
Isolation	20		dB
VSWR		1:1,25	
Forward Power		400	W
Reverse Power		400	W

Mechanical Specifications

Interface/ Connectors	WR 90/ UG 39
Direction	CCW
Weight	220 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications

Operating Temp. Range (°C)	-20	+60
----------------------------	-----	-----