


Waveguide Isolator

IW 14.125-5 W v.2

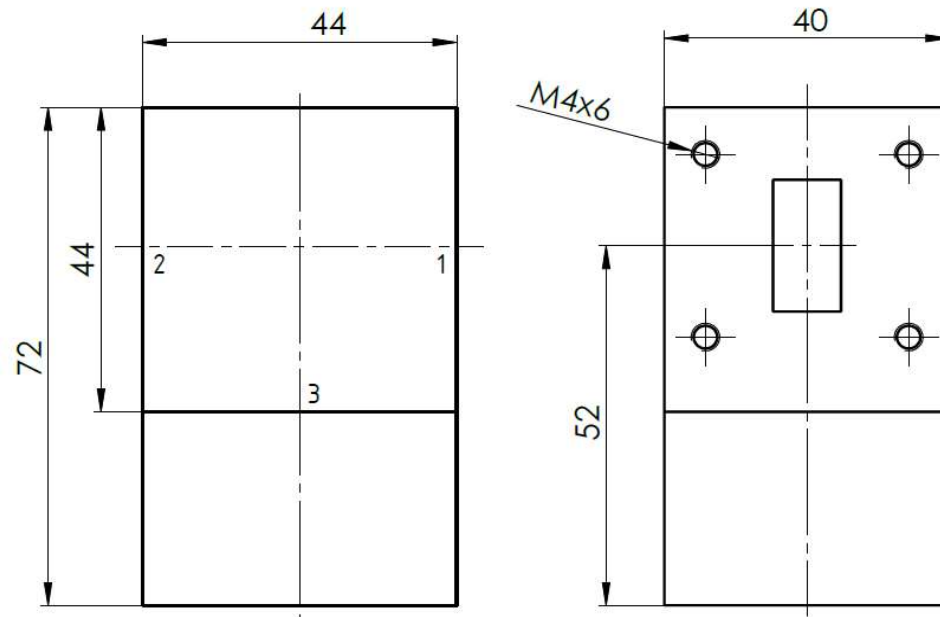

Electrical Specifications

	Min	Max	Unit
Operating Frequency	13,75	14,5	GHz
Insertion Loss		0,3	dB
Isolation	20		dB
VSWR		1,22	
Forward Power		5	W
Reverse Power		5	W

Mechanical Specifications

Interface/ Connectors	WR 75/ UBR 120
Direction	CCW
Weight	250 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications

Operating Temp. Range (°C)	-30	+55
----------------------------	-----	-----