


Waveguide Isolator

IW 6.25-50 W

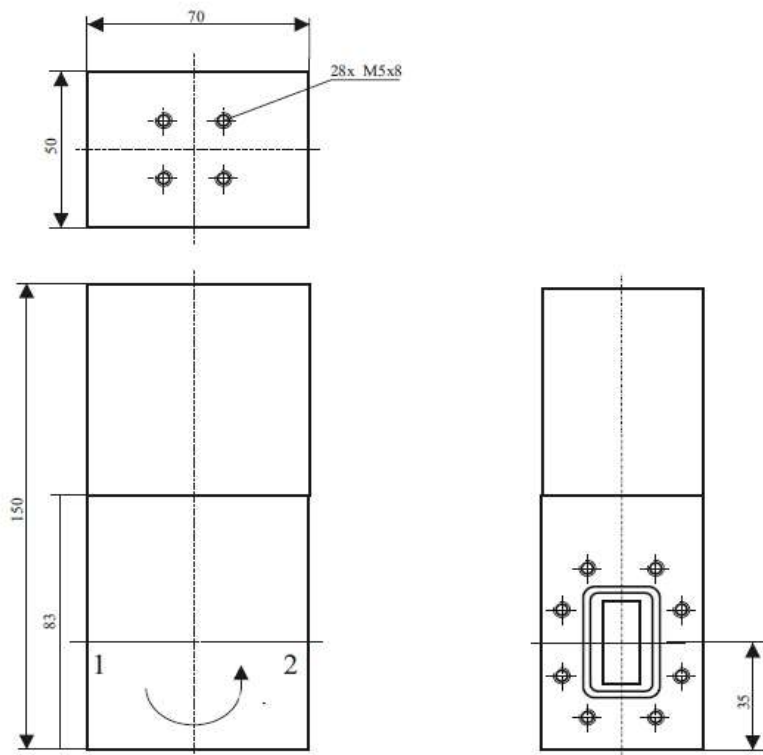

Electrical Specifications

	Min	Max	Unit
Operating Frequency	5,85	6,65	GHz
Insertion Loss		0,3	dB
Isolation	20		dB
VSWR		1,29 :1	
Forward Power		100	W
Reverse Power		50	W

Mechanical Specifications

Interface/ Connectors	WR 137/ CPR 137 G
Direction	CCW
Weight	1000 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications

Operating Temp. Range (°C)	-20	+70
----------------------------	-----	-----