


Waveguide Isolator

IW 8.15-60 W v.4

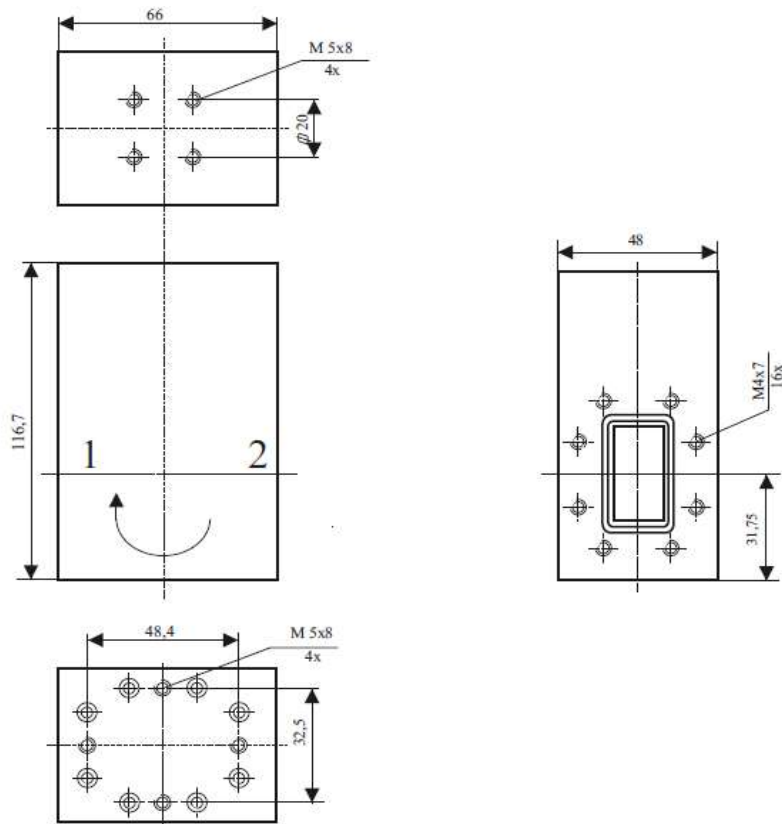

Electrical Specifications

	Min	Max	Unit
Operating Frequency	7,9	8,4	GHz
Insertion Loss		0,3	dB
Isolation	25		dB
VSWR		1,15 :1	
Forward Power		60	W
Reverse Power		60	W

Mechanical Specifications

Interface/ Connectors	WR 112/ CPR 112 G
Direction	CW
Weight	750 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications

Operating Temp. Range (°C)	-20	+60
----------------------------	-----	-----