


## Waveguide Isolators

IWC 6.2875-20 W v.2

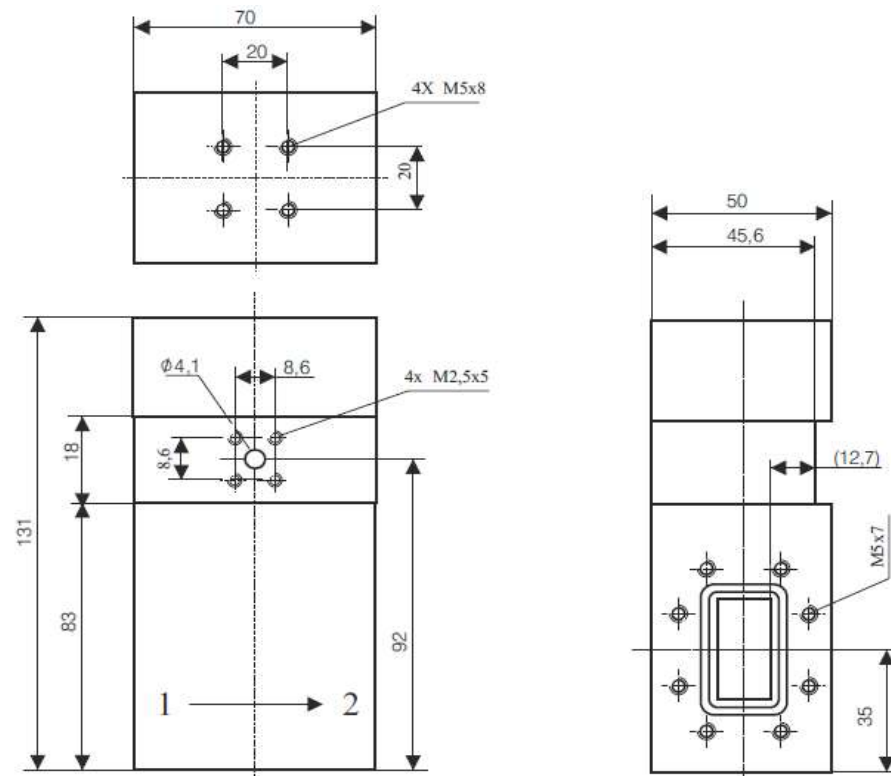

### Electrical Specifications

	Min	Max	Unit
Operating Frequency	5,85	6,725	GHz
Insertion Loss		0,4	dB
Isolation	20		dB
VSWR		1,29:1	
Forward Power		250	W
Reverse Power		20	W

### Mechanical Specifications

Interface/ Connectors	WR 137/ CPR 137 G
Direction	CCW
Weight	850 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

### Environmental Specifications

Operating Temp. Range (°C)	-40	+80
----------------------------	-----	-----