


Waveguide Isolator

IWC 8.15 20W v.5

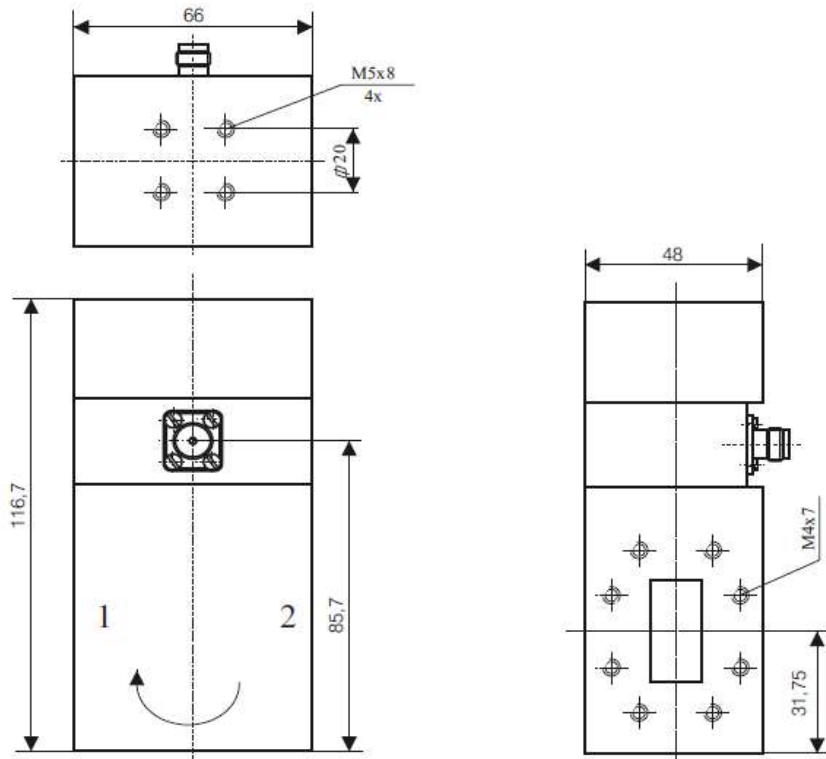

Electrical Specifications			
	Min	Max	Unit
Operating Frequency	7,9	8,4	GHz
Insertion Loss		0,2	dB
Isolation	25		dB
VSWR		1,15	
Forward Power		200	W
Reverse Power		20	W

Mechanical Specifications	
Interface/ Connectors	CPR 112 G
Direction	CW
Weight	850 g
Housing Material	AlMgSi; Steel
Surface	Conversion Coating; Ni-coated

Environmental Specifications		
Operating Temp. Range (° C)	-20	+60